

# **Sediment Liquefaction Around an Object on the Seafloor**

Yoshihiko Maeno

Department of Civil Engineering

College of Science and Technology

Nihon University

1-8-14 Kanda-Surugadai, Chiyoda-ku, Tokyo 101-8308, JAPAN

phone: +81(3)3259-0671      fax: +81(3)3259-0671      email: [maeno@civil.cst.nihon-u.ac.jp](mailto:maeno@civil.cst.nihon-u.ac.jp)

Award Number: N00014-02-1-0430

## **LONG-TERM GOALS**

The long-term goal of the project is to correlate the generation of wave-induced liquefaction to wave and current conditions, to estimate the scale of liquefied sediment in seafloor, and finally to predict the sinking of heavy objects, *e.g.* mines into seafloor.

## **OBJECTIVES**

The effective earth and dynamic pore pressures will be measured in order to identify the scale of liquefaction in seabed and estimate the sinking of heavy objects into seabed. The effective earth pressure and pore pressure fluctuations will be discussed by correlating with the measurements on the shear wave velocities in near surface sediment, water wave and current conditions under stormy weather. To complete the objectives described above, the full scale field verification of probes composed of the units of effective earth pressure transducer or dynamic pore pressure transducer and the laboratory examination on the units of each sensors should be conducted.

## **APPROACH**

The past studies indicated that wave-induced liquefaction causes the sinking of heavy objects *e.g.* mines, concrete blocks and vessels and the surfacing of light objects. Maeno *et al.* (1996,1999) investigated the mechanism of wave-induced liquefaction by conducting the field measurements on effective earth

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>29 SEP 2003</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-2003 to 00-00-2003</b>	
4. TITLE AND SUBTITLE <b>Sediment Liquefaction Around an Object on the Seafloor</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Nihon University,,Department of Civil Engineering,College of Science and Technology,1-8-14 Kanda-Surugadai, Chiyoda-ku, Tokyo 101-8308, JAPAN , ,</b>				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT <b>The long-term goal of the project is to correlate the generation of wave-induced liquefaction to wave and current conditions, to estimate the scale of liquefied sediment in seafloor, and finally to predict the sinking of heavy objects, e.g. mines into seafloor.</b>					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>7</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

pressure and pore pressure fluctuations in seafloor, sea surface elevation, water wave and near shore current velocities, wind velocities, underground water level and tide. Their observations showed only large steep waves induce the fluidization of sediment. And there is some difference on mechanisms of liquefaction between outside and inside surf zone. Outside surf zone, the phase shift of pore pressure from wave pressure at seabed surface causes the fluidization of sediment. Inside surf zone, wave breaking plays an important role on liquefaction. The depth of liquefaction reached up to three feet from seabed surface at the water depth of 6 to 7 meters with the wave height of 3 meters. The strong near shore currents transport the liquefied sediment. Since the breaking point of waves depends on wave height and the water depth that changes with tide, the seafloor is eroded during ebb and low tides and deposited during flood and high tides.

The probes employed in this study should be customized to the project purpose. The probes are composed of the units of effective earth pressure and pore pressure transducers, which had developed and improved to operate in deep water by Maeno & Yabe (2001). The units of transducer should be inspected and examined in laboratory, to obtain the linear calibration between force (pressure) and output (micro strain or voltage) and the relationship between the output and the thickness of sediment. The probes also should be verified by preliminary field measurements at full scale.


The final field measurement at Martha's Vineyards Coastal Observatory (MVCO) will be scheduled to begin September 27, 2003. The effective earth and pore pressures will be discussed with the shear wave velocities, waves and currents measured by Dr. Michael Richardson (NRL, Code 7341, Stennis Space Center) whom the PI works in collaboration with.



***Figure 1 In-situ probe composed of three effective earth pressure transducers, a dynamic pore pressure transducer and a tide gage.***

## WORK COMPLETED

Maeno, Yabe and Toyoko Elmes Co. Ltd. customized the *in-situ* probes composed of three effective earth pressure transducers, a dynamic pore pressure transducer and a tide gage to operate under severe hydrodynamic conditions (bottom currents and surface wave conditions) as shown in Figure 1. The linearity of calibration between pressure and micro strain (output) was confirmed. The correlation between the output (pressure) of earth pressure transducer and the thickness of overburden sediment above and around transducer was examined by the laboratory tests. Figure 2 shows the calibration of earth pressure with the thickness of overburden sediment. There is a good agreement between the measured earth pressure and the theoretically estimated earth pressure.

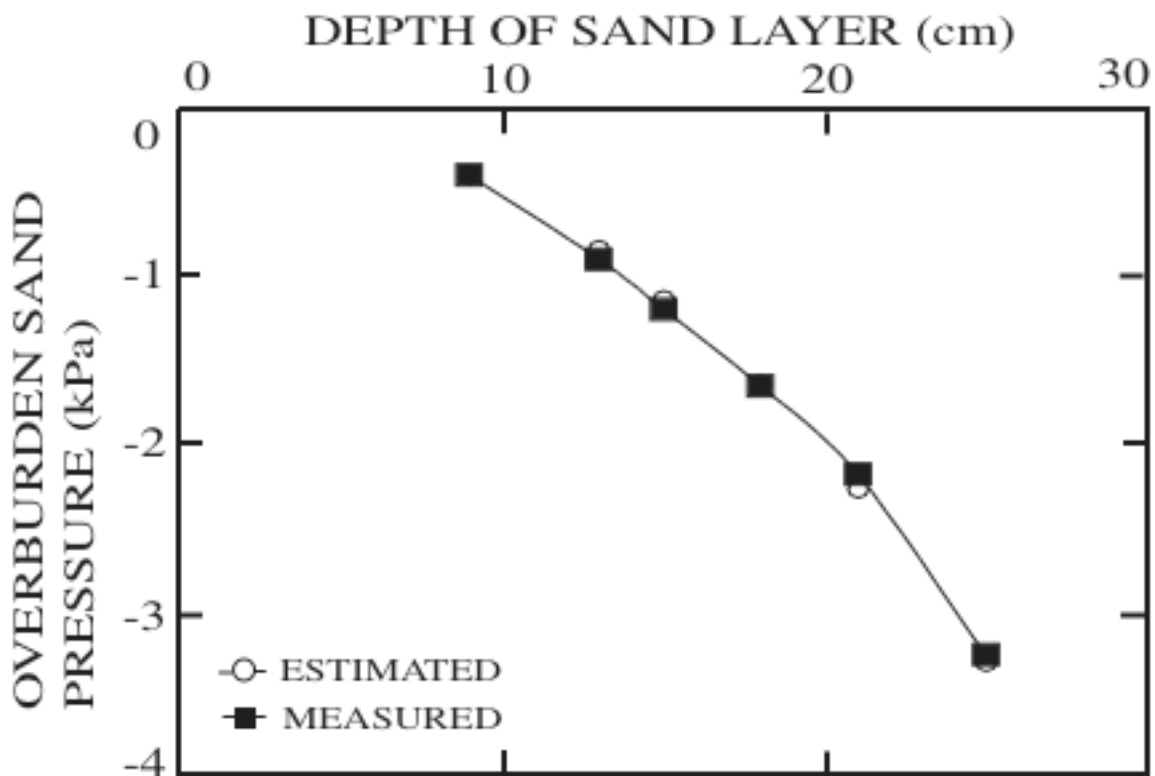


*Figure 2 Relationship between the thickness of overburden sediment and that estimated by the measured earth pressure shows a good agreement.*

## RESULTS

The preliminary *in-situ* verifications of probes were conducted at Hazaki Oceanographical Research Station (HORS) of Independent Administrative Institution Port and Airport Research Institute (PARI), Japan.

Figure 3 shows the changes in effective earth pressures at the top, middle and bottom of connected three units of transducer during the period of the field observation, from 05/15/03 to 07/30/03. The Typhoon Linfa was approaching and affecting the Pacific coast of Japan during 05/29/03 and 05/30/03. In this period the earth pressures considerably decreased because of the erosion of seafloor. There are some differences in the time courses of earth pressures. The curves of each earth pressure separately varied, while they varied parallel with each other without this period. Since the deeper earth pressure transducer was affected by much wider area than that for the near surface transducer, the deeper transducers were more influenced by larger scale bathymetric changes such as the migration of dune and ripples as described above. It is implied from the result that Figure 3 shows that the earth pressure by the deeper transducer is larger than those of top and middle transducers. The curves of effective earth pressures and pore pressure are required to examine in relation to tide, bottom currents, sediment transport and scour.

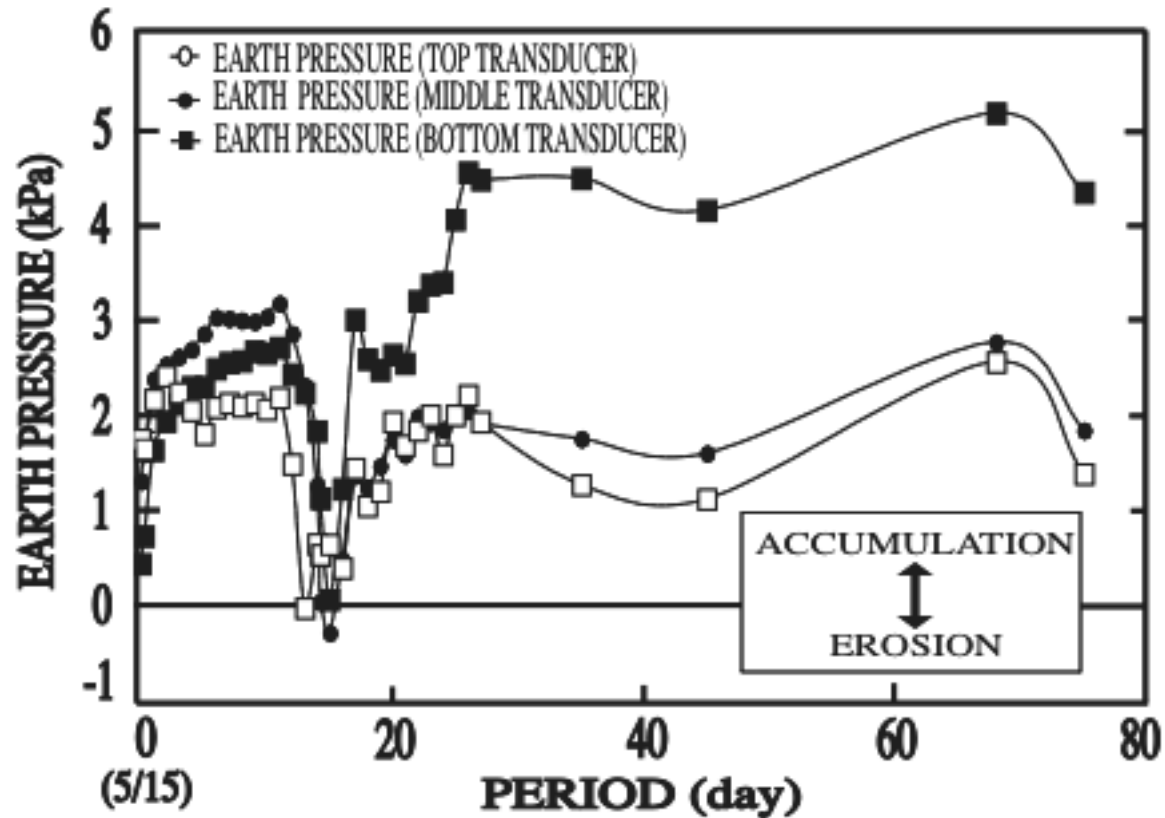

*Figure 3 The changes in earth pressure at various depth below seabed surface.*

*[There are some differences in effective earth pressure among three depths (top, middle and bottom)]*

## IMPACT/APPLICATIONS

The *in-situ* probes could quantify the depth of liquefied sediment around mine-like heavy objects. The improved probes could be applied to the measurement of the rate and scour around a vertical pipe and larger scale bathymetric change such as the migrations of dune and ripple. It also could be applied for predicting the initiation of seabed slide and mudflow by measuring the buildup of pore water pressure and the sudden reduction of effective earth pressure in seafloor. The explication of each mechanism of liquefaction, seabed slide and mudflow and their interactions is required to predict mine burial in seafloor.

## TRANSITIONS

The sophisticated *in-situ* probe is improving to apply the prediction of landslide which possibility is in high potential. Installing the *in-situ* probes into slopes, the effective earth pressure and pore water pressure will be monitored. When the buildup of pore water pressure or the sudden reduction of effective earth pressure is beyond the critical level, a landslide warning will be issued. The field experiences at various locations should be gained to raise the accuracy of prediction.

## RELATED PROJECTS

We are working in collaboration with Dr. Michael Richardson (NRL, Code 7341, Stennis Space Center, MS) to investigate the relationship between the wave-induced liquefaction of seafloor and the deformation of soil skeleton by correlating the effective earth pressure to the shear wave velocity.

## REFERENCES

- Maeno, Y., and Tokutomi, K. (1989): Characteristics of Flexible Filter for Pore Pressure Transducer, Proc. IAHR Workshop on Instrumentation for Hydraulic Laboratories, pp.105-119.
- Maeno, Y., and Tokutomi, K. (1989): Measurements of Wave-Induced Pore Pressure by Flexible Filter, Proc. of IAHR Workshop on Instrumentation for Hydraulic Laboratories, pp.121-135.
- Maeno, Y. (1992): Mechanism of Wave-Induced Liquefaction and Densification in Seabed, (Discussion) Soils and Foundations, JSSMFE, Vol.32, No.3, pp.177-181.
- Maeno, Y., Ishikawa, M., Bando, K., Akiyama, Y., and Yabe, K. (1996): Sediment Movement and Stress Condition in Seabed, Proc. of the 25th Int. Conf. on Coastal Eng., ASCE, Vol.4, pp.3860-3873.
- Maeno, Y., Ishikawa, M., Bando, K., Akiyama, Y., and Yabe, K. (1999): Fluidization of Sand Bed and Sediment Movement in the Surf Zone, Proc. of the 4th Int. Conference on Coastal Engineering and Coastal Sediment Process, Coastal Sediments '99, pp.115-130.
- Maeno, Y. and Kyowa Co. Ltd. (Yabe, K.) (1996): Patent 2696099.
- Nihon University (Maeno, Y.) and Yabe, K. (2001): Patent 130176.